

**BRONX  
HIGHBAY**



**[ FEATURES ]**

The Bronx LED highbay is perfect for industrial, commercial, gymnasium and other applications that would traditionally use HID or fluorescent luminaires. An excellent replacement for 250-1000W metal halides. Features aluminum die-cast housing with anti-corrosion heat sinks and rear air flow channels to maximize heat dissipation, resulting in cooler operation, longer life and improved performance. IP65 damp location rated and operates at -30° to 50° C (-22° to 122°F).

**[ LUMINAIRE INFORMATION ]**

HIGHBAY



Product Detail



Lumens/Watts

21000lm/150W  
28000lm/200W  
42000lm/300W

Input Voltage

120-347V<sup>1</sup>, 200-480V

Efficacy

Up to 140lm/W

CRI

>80

Beam Angle

120° (without reflector)

CCT

4000K, 5000K

Dimming

1% 0-10V

Ambient Temp.

-30° to 50°C (-22° to 122°F)

Mounting

Rigid Eye-bolt

Power Cord

1.83m (6ft) attached

Ingress Protection

IP65 Damp Location


Warranty

5 yrs

Certification



**[ DIMENSIONS ]**


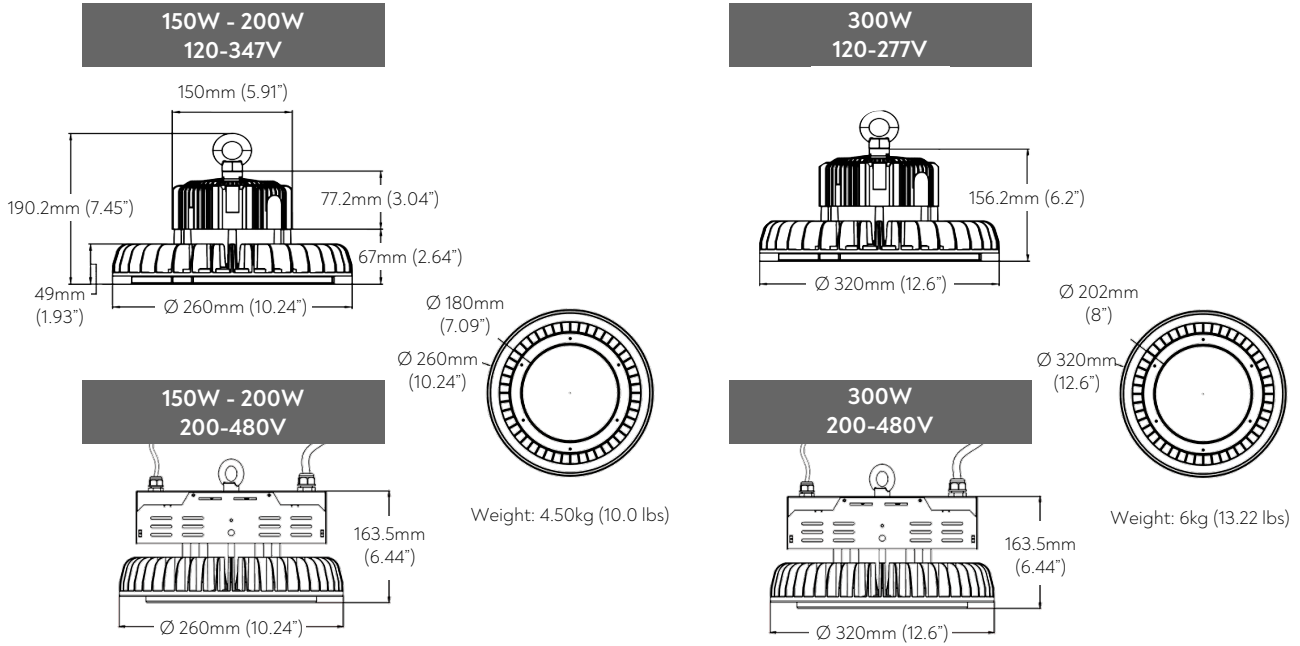


**[ ACCESSORIES ]**

REFLECTORS

19" Polycarbonate Reflector  
60°

260 Aluminum Reflector  
60°



**[ ORDER CODE ]**

<b>BRX</b>		<b>120</b>		<b>80</b>	<b>DIM</b>			
<b>MODEL</b>	<b>LUMENS</b>	<b>BEAM ANGLE</b>	<b>CCT</b>	<b>CRI</b>	<b>DIMMING</b>	<b>VOLTAGE</b>	<b>FINISH</b>	<b>LENS</b>
BRX - HIGHBAY	210 - 21000lm 280 - 28000lm 420 - 42000lm	120 - 120° (Without Reflector)	40K - 4000K 50K - 5000K	80 - 80CRI	DIM - 0-10V	150-200W CUNV - 120-347V HV - 200-480V 300W UNV - 120-277V HV - 200-480V	BK - BLACK (Standard) W - WHITE	GCL - GLASS CLEAR (Standard) PCL - PC CLEAR
<b>EB</b>	<b>PC</b>	<b>ACCESSORIES</b>						
<b>MOUNTING</b>	<b>POWER CORD</b>	WGB1 - BLACK WIRE GUARD (150W & 250W) WGB2 - BLACK WIRE GUARD (300W) 19PO60 - 19" 60° POLYCARBONATE REFLECTOR AL60 - 260 ALUMINUM 60° REFLECTOR						
EB - EYE BOLT	PC - 6FT POWER CORD							

1. 120-347V only available in 150W & 200W

