

MADRID
DOWNLIGHTS
5" Low Glare Design




[FEATURES]

Madrid LED downlights are available in 5" model size with low glare design. Ideal for high ceiling applications in retail, commercial and educational. Superior crisp optics at 45°¹ or 60°² with 90 CRI delivers a unique glow with vivid color. Easy installation and service from below ceiling.

[LUMINAIRE INFORMATION]

RECESSED 

| | |
|--------------------|---|
| Product Detail |  |
| Lumens/Watts | 1800lm/20W 2700lm/30W 4500lm/50W |
| Input Voltage | 120-277V |
| Efficacy | Up to 120lm/W ³ |
| CRI | >90Ra |
| Beam Angle | 45° ¹ , 60° ² |
| CCT | 3000K, 3500K, 4000K |
| Dimming | 1% 0-10V |
| Trim Colour | White (Standard) , Black, Grey |
| Ingress Protection | IP20 Dry Location |
| Warranty | 5 yrs |
| Certification |  |

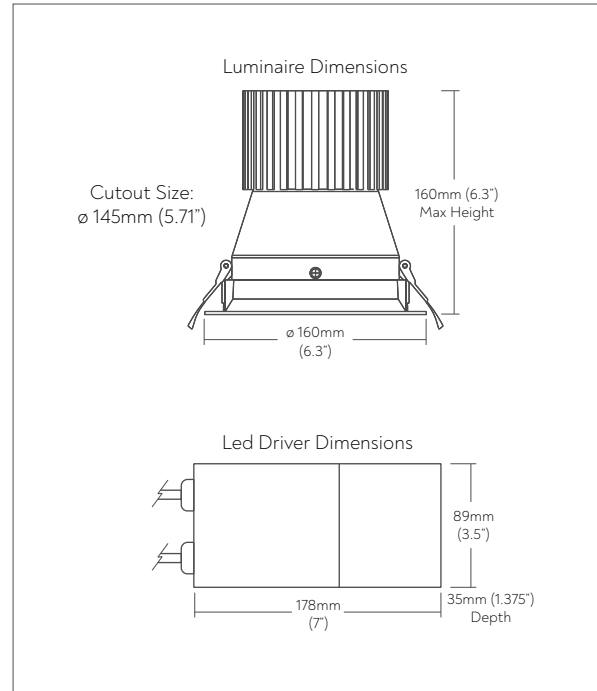

[ORDER CODE]

| | | | | | | | | | | | | | | |
|---------------|---|---|---|---|---|--|---|----------------|---|----------------|---|-------------|---|--|
| MAD5 | - | | - | | - | 90 | - | UNV | - | D | - | CL | - | |
| MODEL | | LUMENS/OPTICS | | CCT | | CRI | | VOLTAGE | | DIMMING | | LENS | | NEW CONSTRUCTION PLATFORM |
| MAD5 - 5 INCH | | 18 - 1800lm/60° 27 - 2700lm/60° 45 - 4500lm/45° | | 30K - 3000K 35K - 3500K 40K - 4000K | | 90 - 90CRI | | UNV - 120-277V | | D - 0-10V | | CL - CLEAR | | (BLANK) - NONE NCR1 - ADJUSTABLE 2" - 6" ROUND |
| | | | | | | WH - WHITE (Standard) BK - BLACK GR - GREY | | | | | | | | 1. Available in 4500lm only 2. Not available in 4500lm 3. Lumens measured without optics |