

VEGAS
RECESSED LINEAR BLADE
Downlight and Wall Wash



FEATURES

Vegas LED recessed linear blade is available in 5 or 10 cells, 45° downlight optic or 100° asymmetric wall wash optic. Ideal for retail, residential and commercial spaces. Easy installation and service from below ceiling. Air tight, damp location and IC rated for use in insulated ceilings.

LUMINAIRE INFORMATION - Downlight


RECESSED

Product Detail




Lumens/Watts/Cell	750lm/10W/5 Cell 1350lm/18W/10 Cell
Input Voltage	110-277V AC
Efficacy	Up to 75lm/W
CRI	>90Ra
Beam Angle	45°
CCT	3000K, 4000K
Dimming	Phase Dimming 10-100%
Cell/Trim Colour	Black Cell/White Trim (Standard) Black Cell/Black Trim
Warranty	5 yrs
Certification	IC, Air Tite, Damp Location

5 Cells / 750lm

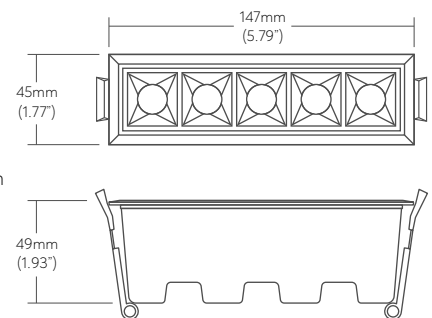

Cutout Size:
139mm x 36mm
(5.47" x 1.42")

10 Cells / 1350lm

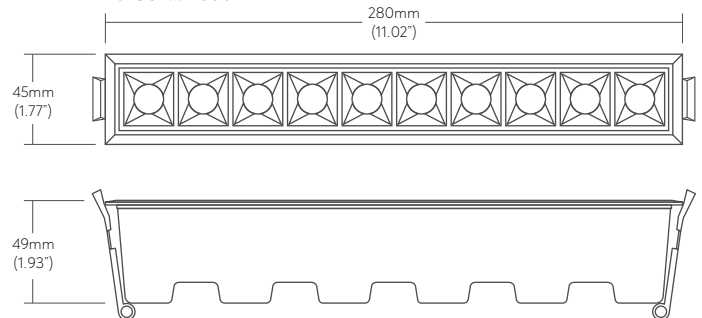

Cutout Size:
272mm x 36mm
(10.71" x 1.42")



[LUMINAIRE INFORMATION - Wall Wash]

Product Detail



Lumens/Watts/Cell 750lm/10W/5 Cell
1350lm/18W/10 Cell

Input Voltage 110-277V AC

Efficacy Up to 75lm/W

CRI >90Ra

Beam Angle 100° Asymmetric

CCT 3000K, 4000K


Dimming Phase Dimming 10-100%

Cell/Trim Colour **Black Cell/White Trim (Standard)**
Black Cell/Black Trim


Warranty 5 yrs

Certification IC, Air Tite,
Damp Location

750lm Wall Wash

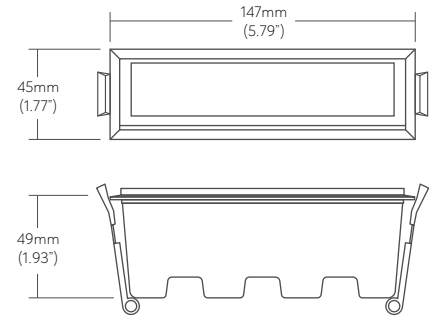


1350lm Wall Wash

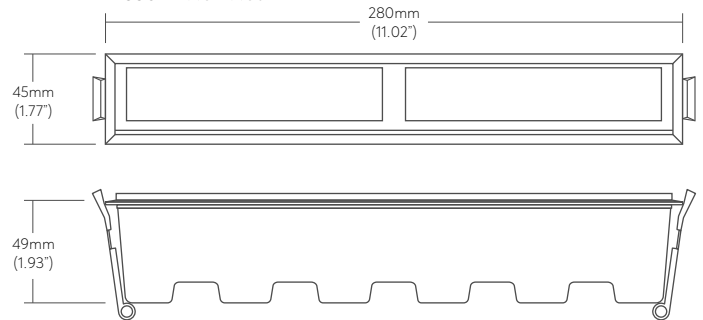


[EXTERNAL DRIVER]

5 Cell
External Driver

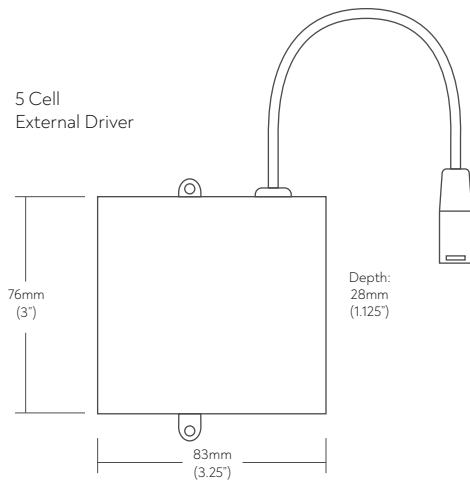

10 Cell
External Driver

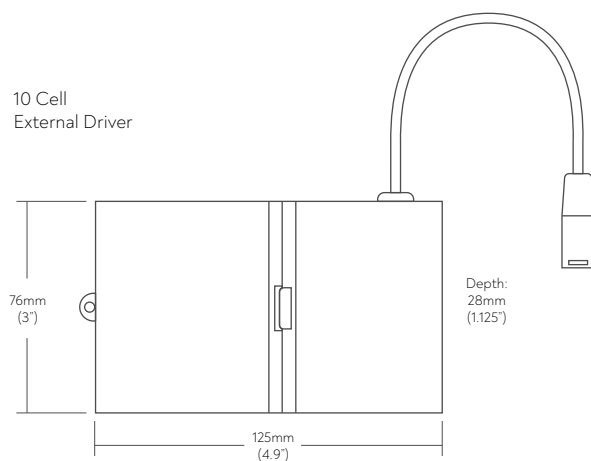

[ORDER CODE]

VEG	-		-		-	UNV	-	90	-	
MODEL		SIZE		CCT		BEAM ANGLE		VOLTAGE		FINISH
VEG - LINEAR BLADE		5 - 5 CELL 10 - 10 CELL		30K - 3000K 40K - 4000K		45 - 45° WW - 100° ASYMMETRIC WALL WASH Consult factory for additional options		UNV - 110-277V		90 - 90CRI BW - BLACK CELL/WHITE TRIM (Standard) BB - BLACK CELL/BLACK TRIM

