

ROME TRACKLIGHTS
Architectural



FEATURES

The Rome LED tracklights are designed to deliver high contrast accent or uniform ambient lighting for retail, commercial and educational applications. Select from 3000K, 3500K or 4000K using the on-board CCT selector. Unique segmented reflectors and glare mitigating prismatic lens delivers high quality beam control and lighting performance with an integrated driver. Track head tilts up to 90° and rotates 355°. Suitable for 3 wire, 1 circuit track. Compatible with Halo track system.

LUMINAIRE INFORMATION



Product Detail



Lumens/Watts

900lm/10W
1800lm/20W
2700lm/30W

Input Voltage

120V

Efficacy

Up to 90lm/W

CRI

>90Ra

Optics

15°, 24°, 36°, 45°, 60°

CCT

3000K, 3500K, 4000K Selectable

Dimming

Phase Dimming 10-100%

Finish

White, Black (Standard), Grey

Track

3 Wire, 1 Circuit
Compatible with Halo track system

Warranty

5 yrs

Certification



WHITE - RAL#9003



BLACK - RAL#9005




GREY - RAL#9006




[DIMENSIONS]

Watts	D	L1	L2
10	Ø 60mm (2.36")	165mm (6.5")	240mm (9.45")
20	Ø 70mm (2.76")	210mm (8.27")	285mm (11.22")
30	Ø 85mm (3.35")	235mm (9.25")	312mm (12.28")

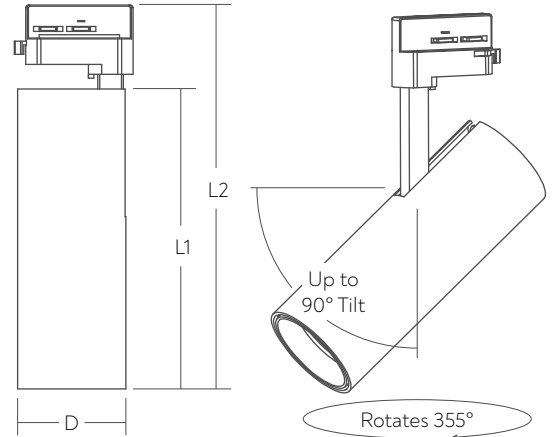

[OPTICS]

Beam Angle



[ORDER CODE]

ROM	-		-	OCC	-		-	120	-	90	-		-	PL	-	
MODEL		LUMENS		CCT		OPTICS		VOLTAGE		CRI		FINISH		LENS		OPTION
ROM - TRACKLIGHT		9 - 900lm 18 - 1800lm 27 - 2700lm		OCC - ON-BOARD CCT CHANGE		15 - 15° ¹ 24 - 24° 36 - 36° 45 - 45° ² 60 - 60° ²		120 - 120V		90 - 90CRI		WH - WHITE (Standard) BK - BLACK (Standard) GR - GREY		PL - PRISMATIC SOFT FOCUS LENS		(BLANK) - NONE HC - HONEYCOMB WR - WALLWASH RING BD - BARN DOOR

1. Only available in 10W
2. Not available in 10W

[QUICK SHIP PART #]

- TR-RO-10W-9L-(Optics)-CCTS-90-120V-TD-(Finish)-FR-NA - ROM-9-OCC-(Optics)-120-90-(Finish)-PL
- TR-RO-20W-18L-(Optics)-CCTS-90-120V-TD-(Finish)-FR-NA - ROM-18-OCC-(Optics)-120-90-(Finish)-PL
- TR-RO-30W-27L-(Optics)-CCTS-90-120V-TD-(Finish)-FR-NA - ROM-27-OCC-(Optics)-120-90-(Finish)-PL

See ORDER CODE for Optics and Finish options.